
Quality Management of Software and Systems

Quality Function Deployment (QFD)

Contents

- ☐ Motivation
- ☐ Fundamental idea of QFD
- ☐ Procedure concerning the application of QFD
- ☐ Involved persons and goals concerning QFD
- ☐ Analysis of customer requirements
- ☐ The House of Quality
- ☐ Development-accompanying QFD
- ☐ Case study measuring/measurement tool

Motivation

- ☐ Ensure
 - That the customer requirements enter the development process as clearly identified requirements
 - That they are consequently realized there up to implementation details
 - Development of quantifiable, checkable target values for the development on the basis of customer requirements
 - Possibility to trace back every decision to a corresponding customer requirement
- ☐ Traditional approach
 - As few faults/errors/defects as possible
 - On schedule
 - High test costs
 - The product will be less bad

Motivation

- ☐ Approach QFD
 - Preventive-oriented quality management
 - Serving the purpose
 - Fulfillment of customer expectations


Motivation

Problems with the Product Development

- ☐ Resources are scarce in principle
- ☐ Customer requirements enter the development process without the taking place of a controlled/directed alignment/orientation of the development potentials
- ☐ In the development phases capacities are used in positions which cannot clearly or often only intuitively be assigned to a requirement on the part of the customer

Fundamental Idea of QFD

- ☐ Systematic application of the resources in those positions which ensure the fulfillment of the most important customer requirements.

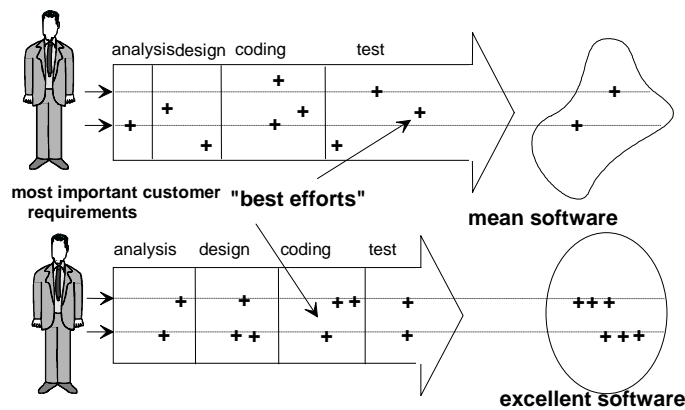


Procedure concerning the Application of the QFD

- ☐ Identification of customer requirements
- ☐ Weighting of customer requirements
- ☐ Weighted customer requirements passed on to the phases of the software development process where they are handled and realized

Involved Persons and Goals concerning QFD

- ☐ Team consisting of the members of the individual development phases (e.g. marketing, development, quality assurance)
- ☐ Persons who can provide important information for the product design in the current phase
- ☐ Support of the coordination of all units involved in the development process
- ☐ Goals
 - Working out of objectives for the development and quality assurance based on the customer requirements
 - Tracing of the realization of customer requirements through all development phases up to implementation details
 - Avoidance of too complex software resp. not user-oriented software
 - Early identification of risks which are otherwise often detected during or after the implementation phase
 - Reduction of development time

Analysis of Customer Requirements

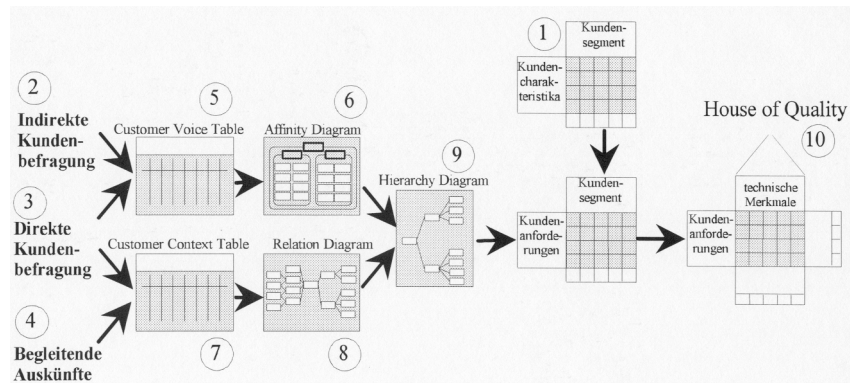

Analysis of Customer Requirements

- ☐ Steps
 - Segmentation of customer groups on the basis of different characteristics (1)
 - Determination of target groups based on this segmentation
 - Determination of customer requirements by
 - Indirect survey in the environment of future clients (2)
 - Direct interview with future users or with the aid of customer observations, e.g. concerning the handling of a prototype (3)
 - Information concerning products already in use (e.g. loud, problems, questions) (4)
- ☐ Problems of the direct interview
 - The requirements given by the customer are often about design concepts or solutions
 - Customers intensely think – particularly in the software development – in solutions
 - Possibly manipulation of the software engineer so that not the most cost- or time-effective solution for the customer is developed
- ☐ Consequence: ask customer for the reasons concerning all of his requirements

Analysis of Customer Requirements

- ☐ Recording of customer requirements
 - Customer Voice Table (5)
 - Writing down of customer requirements thematically structured, e.g. according to
 - Problems
 - Requirements
 - Technical realization possibilities
 - Charging of time and costs
 - Completion of the gained information
 - Examination for their validity
- ☐ Affinity Diagram (6)
 - Cluster the customer requirements
 - Ignore connection to possible realization possibilities
 - Identify backgrounds for requirements (e.g. should be self-explanatory: possible cause: easy to handle or easy learnable)
 - Identify generic terms for requirements
 - Subsume similar requirements


Analysis of Customer Requirements

- ☐ Customer Context Table (7)
 - Statements about the customer environment
 - Who?
 - When?
 - Where?
 - Why?
 - What?
 - How?
- ☐ Relation Diagram (8)
 - Listing of contents of the Customer Context Table in consideration of their dependences
- ☐ Hierarchy Diagram (9)
 - Contents of the Relation Diagram and the Affinity Diagram structured according to thematic levels

Customer Segments/Customer Requirements Matrix

- ☐ Evaluates the customer requirements according to their importance for the individual customer segments
- ☐ Generates customer requirements evaluated according to their priority as input for the House of Quality

The House of Quality

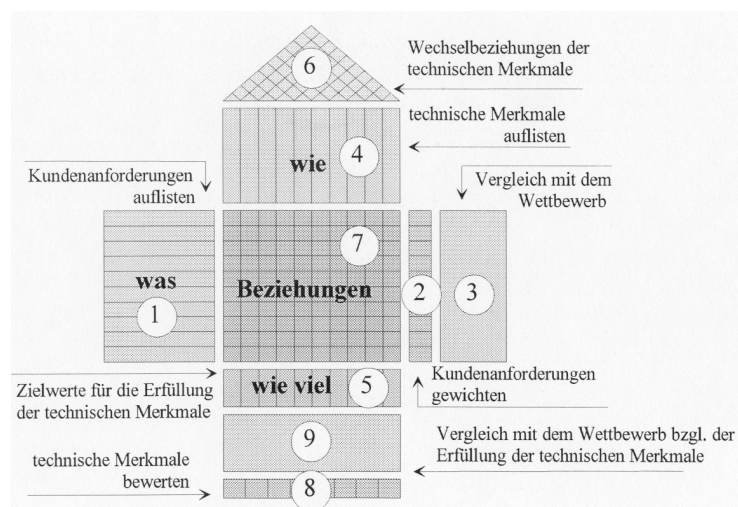


The House of Quality

- ☐ Goal
 - Realization of the customer requirements in physical characteristics in consideration of important factors for the development process
- ☐ Steps
 - List customer requirements (1)
 - Weight customer requirements in pair wise comparison (2). This prioritization serves the purpose to direct the attention to the basics of the product development and to control the investment properly
 - Make competitive comparisons to determine objectives for a positioning in the market (3)
 - Determination of the technical characteristics for the realization of the customer requirements (4)
 - Target values of these technical characteristics (5) provide the guide values for the fulfillment of the technical characteristics
 - Determine to what extent technical characteristics influence each other and if these dependences are positive or negative (6)

The House of Quality

- ☐ The relation/connection/correlation matrix (7)
 - Gives information about which customer requirements are realized by which technical characteristics
 - To the cross points relation symbols are mapped
 - Already here it can be tested/checked if a customer requirement has been forgotten (row did not get a symbol), or
 - if a technical characteristic exists which has no relation to customer requirements (column is empty)
- ☐ Product of the weighting of a customer requirement and the factor of the relation gives the local priority of a technical characteristic
- ☐ The sum of these priorities gives the evaluation of the technical characteristics (8). Those characteristics get a high evaluation which relate to highly important requirements or to very many requirements
- ☐ A competition comparison concerning the technical characteristics (9) provides again comparative analyses with regard to the scope

Development-Accompanying QFD

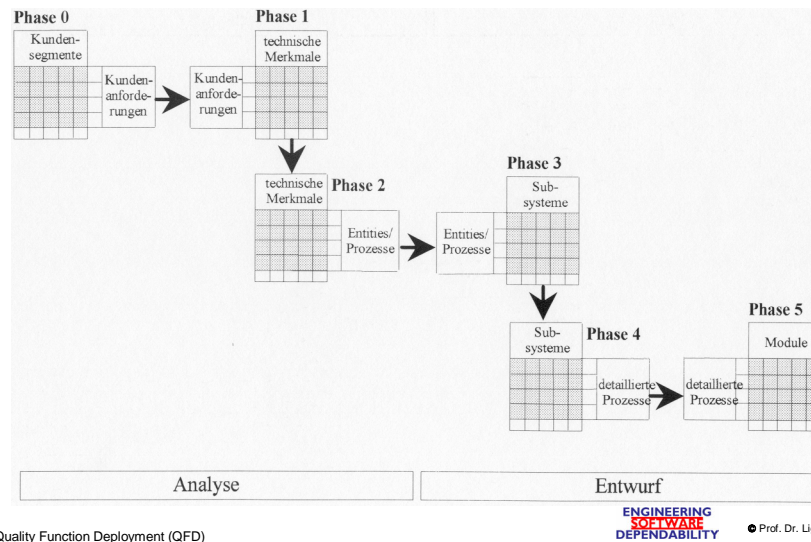

Case Study Measuring/Measurement Tool

- ☐ A product to be regenerated is to be analyzed with the aid of QFD. It is about a tool for the determination of software measurements
- ☐ Software developers, staff members in quality assurance departments/sections and software managers are intended as target groups (customer segments)

Case Study Measuring/Measurement Tool

- ☐ Consider customer segments vs. customer characteristics (1)

	developer	QS	manager
knowledge concerning measuring	o	+	o
trained with regard to tool use	+	+	-
typ. problem evaluation	local	local to global	global
expected acceptance	o	+	o

- For the description of dependences different value scales are used. Here the following scale is assumed
 - unimportant = 0, minor important = 1, mean = 3, strong = 5, very strong = 7, extremely strong = 9

Case Study Measuring/Measurement Tool

- ☐ Consider customer segments with regard to criteria important for the company
- For these purposes at first the priorities of the corresponding criteria have to be compared with each other

	saleable number	buying decision ability	multiplier effect
saleable number	1	5	3
buying decision ability	0,2	1	0,33
multiplier effect	0,33	3	1
	Σ 1,53	Σ 9	Σ 4,33

saleable number is a more important criterion in measures (=3) than the multiplier effect

Case Study Measuring/Measurement Tool

- Scaling to column sum = 1:

	saleable number	buying decision ability	multiplier effect	0,69 = 3/4,33	0,63 = 1,9/3
saleable number	0,65	0,56	0,69	$\Sigma 1,9$	0,63
buying decision ability	0,13	0,11	0,08	$\Sigma 0,32$	0,11
multiplier effect	0,22	0,33	0,23	$\Sigma 0,78$	0,26
	$\Sigma 1$	$\Sigma 1$	$\Sigma 1$	$\Sigma 3$	$\Sigma 1$

Case Study Measuring/Measurement Tool

- Transfer of criteria priorities

	developer	QS	manager	
saleable number prio: 63 %	sale: 10000 local: 0,91 global: 57,3 %	sale: 500 local: 0,045 global: 2,8 %	sale: 500 local: 0,045 global: 2,8 %	$\Sigma 11000$ $\Sigma 1$ $\Sigma 63 \%$
buying decision ability prio: 11 %	1 local: 0,11 global: 1,2 %	3 local: 0,33 global: 3,6 %	5 local: 0,56 global: 6,2 %	$\Sigma 9$ $\Sigma 1$ $\Sigma 11 \%$
multiplier effect prio: 26 %	1 local: 0,11 global: 2,9 %	3 local: 0,33 global: 8,6 %	5 local: 0,56 global: 14,6 %	$\Sigma 9$ $\Sigma 1$ $\Sigma 26 \%$
segment priority	$\Sigma 61,4 \%$	$\Sigma 15 \%$	$\Sigma 23,6 \%$	


Case Study Measuring/Measurement Tool

□ Customer Voice Table (5)

customer requirement	technical restrictions	...
determine McCabe	occupy max. 100 kByte memory	...
limit value specification	...	
determine Halstead		
variable condition		
statistical functions		
graphical processing		

Case Study Measuring/Measurement Tool

□ Affinity Diagram for the Customer Voice Table (6)

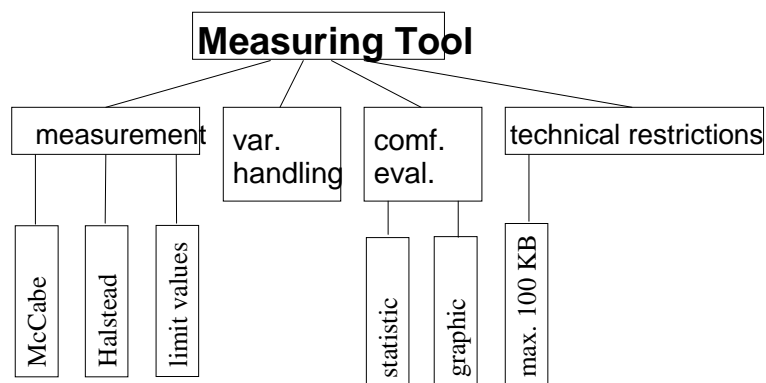

Case Study Measuring/Measurement Tool

□ Customer Context Table (7)


	Who?	When?	Where?	Why?	What?	How?
is	manager	working time	office	progress and quality control	system up to 100 modules	PC, Batch
is not						
event.		evenings				

	Who?	When?	Where?	Why?	What?	How?
is	developer	working time	office	check target values	individual modules	workstation, interactive
is not						
event.		evenings, weekend				

Case Study Measuring/Measurement Tool

□ Hierarchy Diagram (9): additional requirements due to the Customer Context Table

- PC- and workstation-version
- at least 100 modules must be analyzable
- Batch operation and interactive

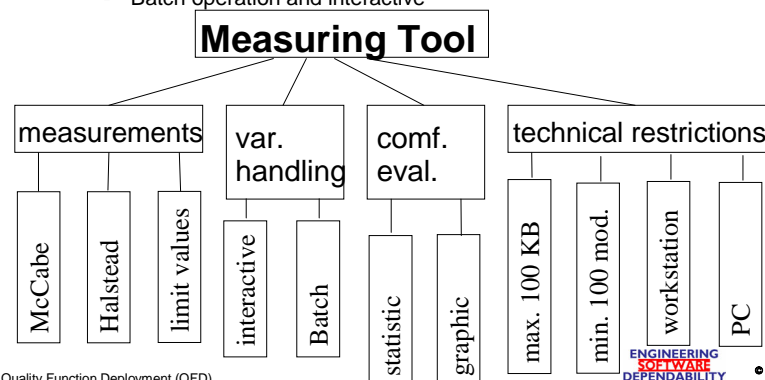

Case Study Measuring/Measurement Tool Customer Segments/Customer Requirements Matrix

	developer, 61,4 %	QS, 15 %	manager, 23,6 %	total weight of the requirem.
limit values	1/2 %	5/1,5 %	7/3 %	Σ 6,5 %
McCabe	5/9,9 %	5/1,5 %	5/2,2 %	Σ 13,6 %
Halstead	3/5,9 %	3/0,9 %	3/1,3 %	Σ 8,1 %
Batch op.	1/2 %	7/2,1 %	7/3 %	Σ 7,1 %
interactive op.	7/13,9 %	7/2,1 %	1/0,4 %	Σ 16,4 %
statistic	1/2 %	3/0,9 %	5/2,2 %	Σ 5,1 %
graphic	1/2 %	3/0,9 %	7/3 %	Σ 5,9 %
min. 100 Mod.	0/0 %	3/0,9 %	5/2,2 %	Σ 3,1 %
max. 100 kB	3/5,9 %	3/0,9 %	5/2,2 %	Σ 9 %
workstation	9/17,8 %	5/1,5 %	0/0 %	Σ 19,3 %
PC	0/0 %	5/1,5 %	9/3,9 %	Σ 5,4 %
	Σ 31/61,4 %	Σ 49/15 %	Σ 54/23,6 %	

QMSS - Quality Function Deployment (QFD)

column each standardized to segment priority

Prof. Dr. Liggemeyer, 27

Case Study Measuring/Measurement Tool The House of Quality

- ☐ Weighting of customer requirements concerning competition factors:
- ☐ Weights
 - 1 = bad resp. nonexistent, 2 = weak, 3 = mean, 4 = good, 5 = very good
- ☐ Sales argument
 - 1,0 = no argument; 1,2 = weak sa, 1,5 = strong sa

QMSS - Quality Function Deployment (QFD)

Prof. Dr. Liggemeyer, 28

Case Study Measuring/Measurement Tool The House of Quality

	Requ. weight.	now	comp. A	comp. B	plan	Improve.	sa	total	priority
limit values	6,5 %	1	3	2	4	4	1,2	31,2	5,5 %
McCabe	13,6 %	1	4	1	5	5	1,2	81,6	14,5 %
Halstead	8,1 %	1	1	4	4	4	1,5	48,6	8,6 %
Batch op.	7,1 %	1	4	1	4	4	1,5	42,6	7,6 %
interactive op.	16,4 %	1	1	3	4	4	1,2	78,7	14 %
statistic	5,1 %	1	3	1	3	3	1,2	18,4	3,3 %
graphic	5,9 %	1	1	3	4	4	1,5	35,4	6,3 %
min. 100 Mod.	3,1 %	1	5	2	4	4	1,2	24,5	4,3 %
max. 100 kB	9 %	1	1	2	3	3	1,2	32,4	3,6 %
workstation	19,3 %	1	1	5	5	5	1,5	144,8	25,7 %
PC	5,4 %	1	5	1	4	4	1,2	25,9	4,6 %
									Σ 100 %

QMSS - Quality Function Deployment (QFD)

$$iprvt. = \frac{plan}{now}; total = requir. - weight. * iprvt. * sa$$

Prof. Dr. Liggesmeyer, 29

Case Study Measuring/Measurement Tool Customer Requirements/Technical Requirements Matrix

	priority	command language	window system	compiler-compiler	data compression	graphic library	statistic library	scanner a. parser
limit values	5,5 %	5	3	0	0	0	0	1
McCabe	14,5 %	0	0	0	0	0	0	9
Halstead	8,6 %	0	0	0	0	0	0	9
Batch op.	7,6 %	9	0	1	0	0	0	0
interactive op.	14 %	3	7	1	0	3	0	0
statistic	3,3 %	1	0	0	0	0	7	0
graphic	6,3 %	0	7	0	0	7	1	0
min. 100 mod.	4,3 %	3	3	0	7	1	1	0
max. 100 kB	3,6 %	1	0	0	9	0	0	0
workstation	25,7 %	1	1	7	1	1	0	0
PC	4,6 %	3	5	7	7	5	5	0
	Σ 100 %	197,2	220,2	233,7	120,4	139,1	56,7	213,4
normalized		16,7 %	18,6 %	19,8 %	10,2 %	11,8 %	4,8 %	18,1 %

QMSS - Quality Function Deployment (QFD)

Prof. Dr. Liggesmeyer, 30